




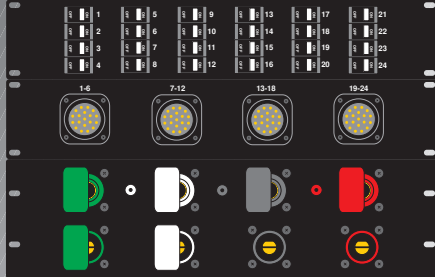



Mains Breaker Options

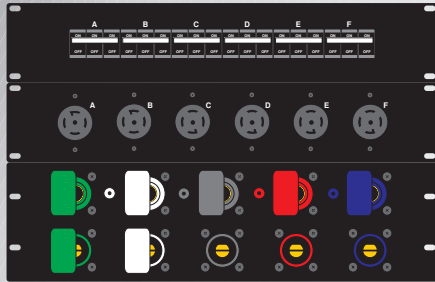


DRPDSO-2460-2P
adding TQD-2D Mains panel

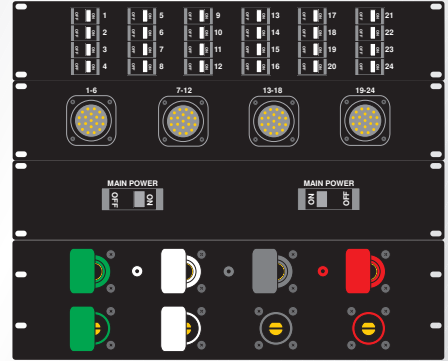


DRPD23F-3P
adding TQD-3S Mains panel

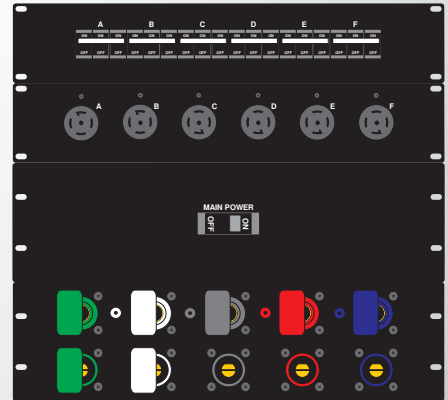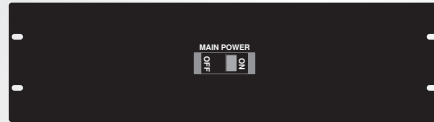


Mains Breaker panel option creates a local disconnect at the panel distro. Amperage range from 150a to 225a per breaker. Mains available as a single two pole, single three pole or dual mains doubling the ampacity. Mains breakers hardwired directly between Cam inputs and branch breakers. Panel construction is made from mild steel, powdercoated black w/ standard IEC rack holes.

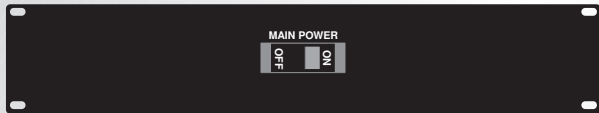


Single 2pole Mains

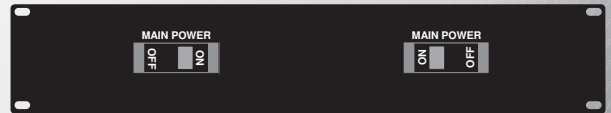

Dual 2pole Mains

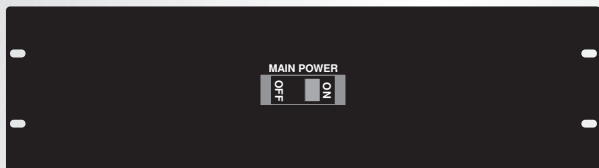

Single 3pole Mains

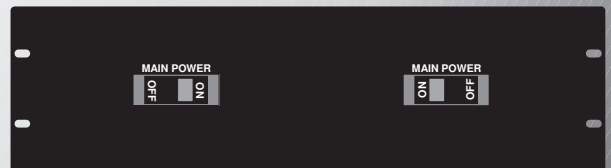

Dual 3pole Mains

